

Ceramic MG Water heaters

Ceramic heating element
+ magnesium anode = CERAMIC MG
Extra longer life
and energy saving

Easy-to-handle grip

High quality
enamelled tank

0 % CFC high density
insulation foam

Optimised stainless
steel outlet pipe


Magnesium anode:
ultimate protection against
corrosion

Mechanical thermostat

Enamelled steel sleeve

Ceramic heating element

Stainless steel
inlet diffuser

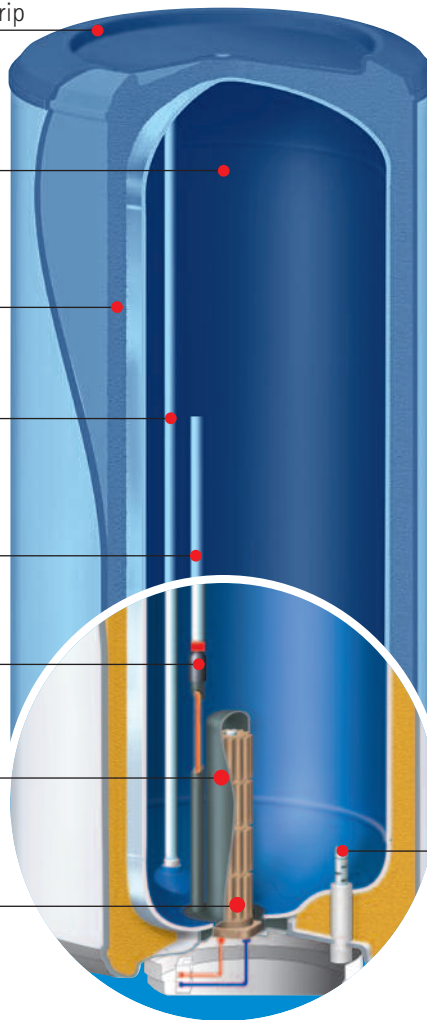



Ratings and dimensions

Vertical range

Capacity (L)	Output (W) 230 V	Voltage (V)	Energy Consumption (kWh/24h at 65°C)	Heat-up time at 60°C ($\Delta t=20^{\circ}\text{C}$)	Heat-up time at 60°C ($\Delta t=50^{\circ}\text{C}$)
50	1800	230 (220-240)	0,82	0h40	1h45
75	2400	230 (220-240)	1,02	0h50	2h00
100	2400	230 (220-240)	1,25	1h03	2h31
150	2400	230 (220-240)	1,59	1h35	3h57

Capacity (L)	Dimensions (mm)						Flange opening (\emptyset)	Weight empty (kg)
	A	B	C	D	E	F		
50	576	-	368	156	-	505	112 mm	22
75	742	-	570	120	-	505	112 mm	27
100	913	-	748	113	-	505	112 mm	32
150	1246	798	1048	146	-	505	112 mm	41



(For other standards, consult us)

Floor standing range

Capacity (L)	Output (W) 230 V	Voltage (V)	Energy Consumption (kWh/24h at 65°C)	Heat-up time at 60°C ($\Delta t=20^{\circ}\text{C}$)	Heat-up time at 60°C ($\Delta t=50^{\circ}\text{C}$)
200	2400	230 (220-240)	1,89	1h54	4h45
300	3000	230 (220-240)	1,91	2h18	5h46

Capacity (L)	Dimensions (mm)						Flange opening (\emptyset)	Net Weight (kg)
	A	B	C	D	E	\emptyset		
200	1258	270	160	31	598	575	82 mm (curved)	58
300	1761	270	160	31	598	575	82 mm (curved)	73



(For other standards, consult us)

