




Combi MG

Water heaters

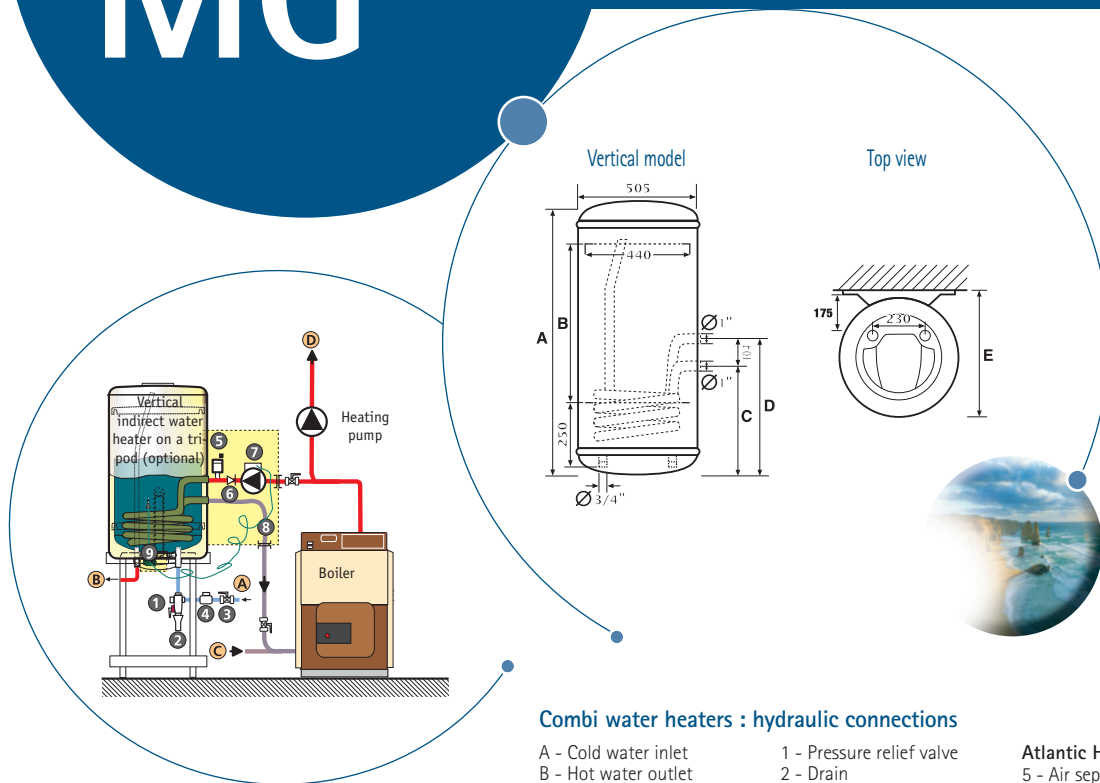

Combi water heaters : hydraulic connections

- A - Cold water inlet
- B - Hot water outlet
- C - Primary circuit inlet
- D - Primary circuit outlet

- 1 - Pressure relief valve
- 2 - Drain
- 3 - Valve
- 4 - Pressure reducing valve
- 9 - Thermostat for heating medium pump

- Atlantic Hydraulic kit**
- 5 - Air separation
 - 6 - 1st circuit (coil)
 - 7 - Pump
 - 8 - Flexible connection

Ratings and dimensions

A : Tripod height, add 490 mm

Vertical wall-mounted Option: Ceramic electric water heater kit, 2400 W triple phase

Capacity (L)	Boiler exchanger output (kW)		Boiler heat-up time (mn)		Output (W)	Voltage (V)	Maximum flow rate (L)				Surface (M²)	Standing losses (mbar)		Energy consumption
	(1)	(2)	(1)	(2)			(1)	(1)**	(2)	(2)**		(1)	(2)	
75	19,3	14,4	19	27	2400	400/230	476	121	355	121	0,53	135	25	1,12
100	19,3	14,4	26	36	2400	400/230	476	162	355	156	0,53	135	25	1,28
150	25,6	16,8	29	46	2400	400/230	631	243	414	205	0,66	150	30	1,68
200	25,6	16,8	38	61	2400	400/230	631	272	414	205	0,66	150	30	2,06

Capacity (L)	Dimensions (mm)					Net weight (kg)
	A	B	C	D	E	
75	737	320	386	490	519	36
100	908	498	393	497	519	41
150	1242	798	437	541	519	55
200	1568	798	437	541	519	63

*KWh/24h at 65°C - ** Tests according to EN 625

(1) Primary temperature at 90°C - Flow 2m³/h - Hot water at 45°C - Storage at 60°C

(2) Primary temperature at 80°C - Flow 1m³/h - Hot water at 45°C - Storage at 60°C



(For other standards, consult us)

www.atlantic-comfort.com