

O'Pro Square

Water heaters

Optimised stainless steel outlet pipe

High quality enamelled tank TiO+CuO



Magnesium anode

Copper immersion heating element


External knob regulation

High density insulation foam

Stainless steel inlet diffuser

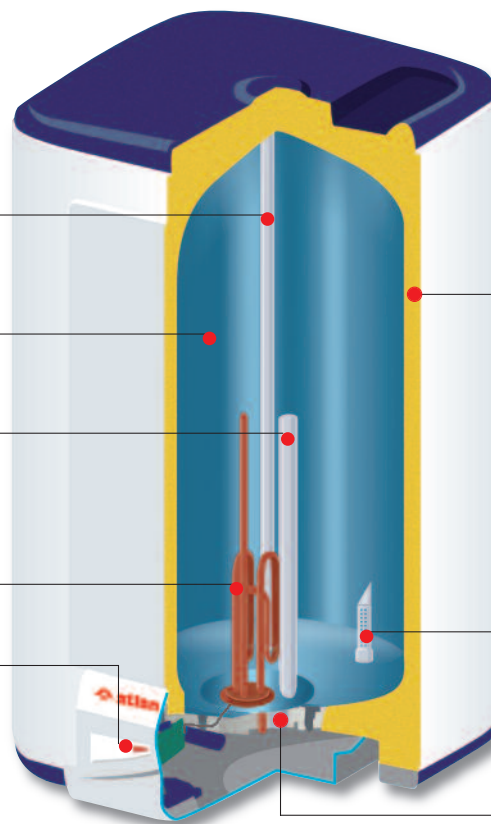

O'PRO SYSTEM



+ 50%*
Life time

* The Atlantic ohmic resistance ensures EXTRA LIFE for the magnesium anode.

Consequence : O'PRO system = greater protection = longer tank life.

O'pro
Ohmicprotection



Ratings and dimensions

Specifications

Capacity (L)	Output (W)	Voltage (V)	Heat-up time at 60°C ($\Delta t=20^{\circ}\text{C}$)	Heat-up time at 60°C ($\Delta t=50^{\circ}\text{C}$)
15	2000	230	10	24
30	2000	230	24	60
50	2000	230	40	99
75	2000	230	58	143
100	2000	230	77	191

Dimensions

Capacity (L)	Dimensions (mm)										Net Weight (kg)
	A	B	C	D	E	F	G	J	I	Flange opening (\varnothing)	
15	403	342	347	100	100	184	1/2"	337	-	72	9
30	624	342	347	100	100	184	1/2"	477	-	72	12
50	950	342	347	100	100	184	1/2"	750	-	72	17
75	703	490	510	175	230	440	3/4"	600	250	72	30
100	867	490	510	175	230	440	3/4"	750	250	72	30



(For other standards, consult us)

